


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	11/26/2019		

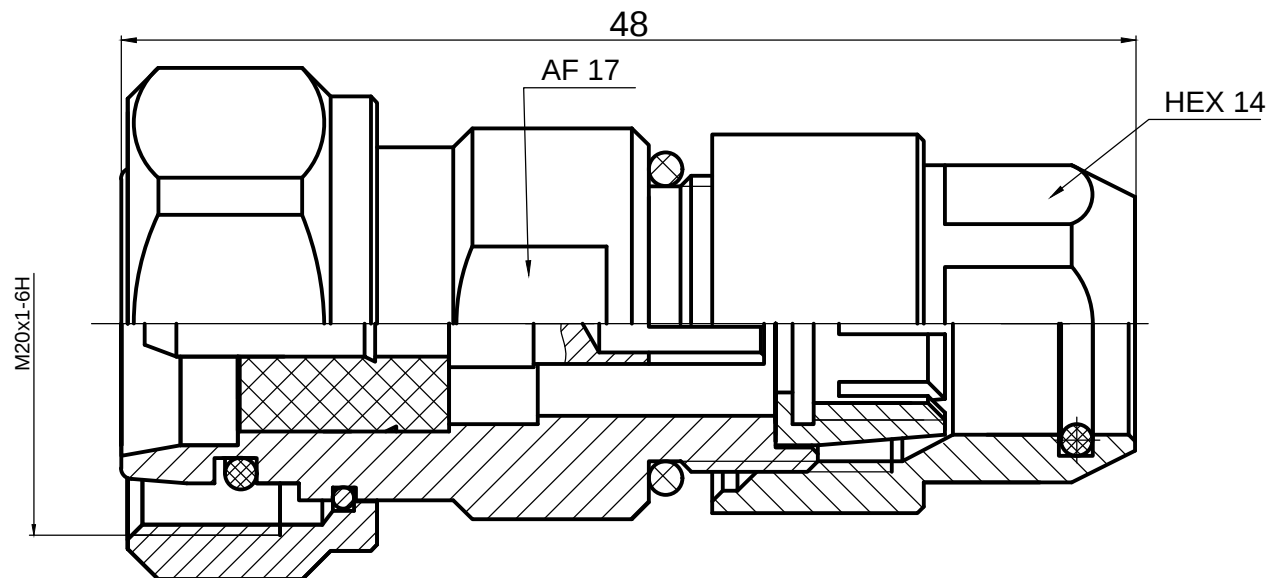

Material & Finishing:

1. Center conductor: Brass, Silver Plating
2. Insulators: PTFE
3. Body : Brass, Ternary alloy Plating
4. Other: Brass ,Nickel Plating
5. Gasket: Silicone Rubber

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6 GHz
3. VSWR: 1.15 (0-3GHz)
4. Insulation resistance: $\geq 5000\text{M}\Omega$
5. PIM: $\leq -155\text{dBc}$

RoHS Compliant.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

Unit:mm



Raynool Technology Co., Ltd.

Title

4.3/10 MALE CLAMP FOR 3/8 SUPERFLEX CABLE

Drawn by

Ckd by

Appd by

Date

11/26/2019

Scale
4:1

Sheet 1 of 1

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64 MAX.

ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
 $x \pm 1.0$ $\pm 1/64$ $x' \pm 1^\circ$
 $x.x \pm 0.5$ $x.xx \pm 0.1$ $x'x' \pm 0.5'$

THESE DRAWING & SPEC. ARE THE
PROPERTY OF Raynool
AND SHALL NOT BE REPRODUCED,
OR COPIED OR USED AS THE BASIS
FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT
THEIR EXPRESS WRITTEN CONSENT.