


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	04/14/2019		

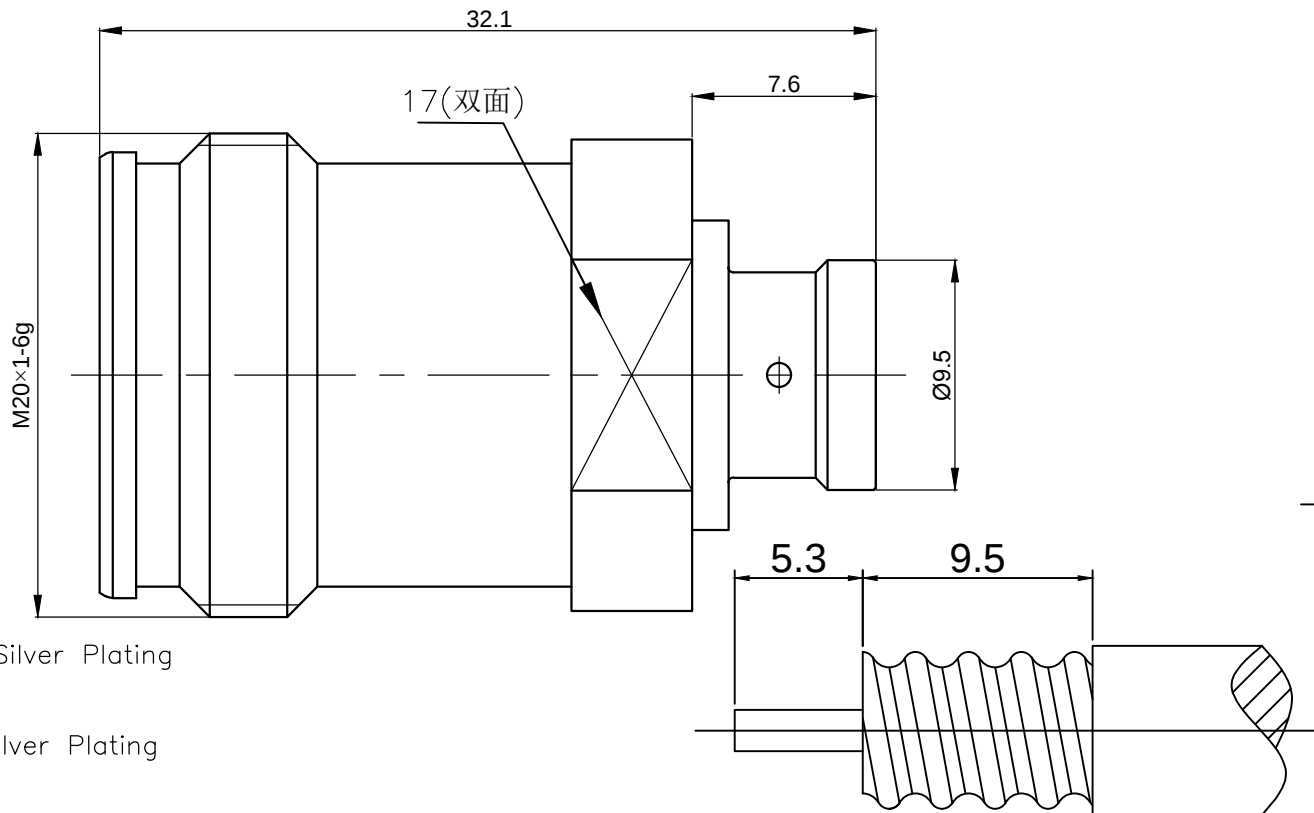

Material & Finishing:

1. Center conductor: Phosphor Bronze, Silver Plating
2. Insulators: PTFE
3. Body : Brass, Ternary alloy Plating
4. Contact Head , Phosphor Bronze, Silver Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~3GHz
3. VSWR: ≤ 1.15
4. Proof Voltage : 1500 Veff

PIM: ≤ -160 dBc(2*43dBm)

RoHS Compliant.

ALL DIMENSIONS ARE IN MILLIMETERS AND [INCHES]

Unit:mm

RayNool
Raynool Technology Co., Ltd.

Title

4.3-10 Female SPP-250-LLPL Cable

Drawn by

Ckd by

Appd by

Date

04/14/2019

Scale

4:1

Sheet 1 of 1

3660401

3.660.G401

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64/MAX.

ALL TOLERANCES ARE:
DECIMALS FRACTIONS ANGLES
x $\pm$ 1.0 $\pm$ 1/64 $^{\circ}$ $\pm$ 1"
x.x $\pm$ 0.5 $^{\circ}$ $\pm$ 0.5"
x.xx $\pm$ 0.1 $^{\circ}$ $\pm$ 0.5"

THESE DRAWING & SPEC. ARE THE
PROPERTY OF Raynool
AND SHALL NOT BE REPRODUCED,
OR COPIED OR USED AS THE BASIS
FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT
THEIR EXPRESS WRITTEN CONSENT.