
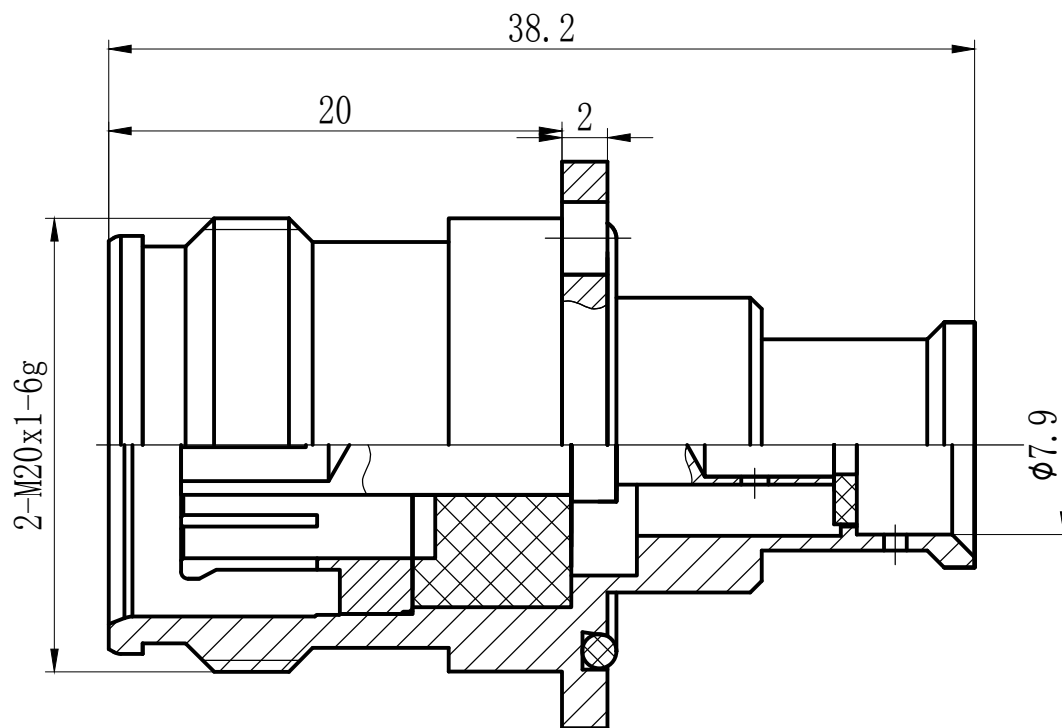


RevNo	Revision note	Date	Signature	Checked
00	Sketch Only	12/07/2019		

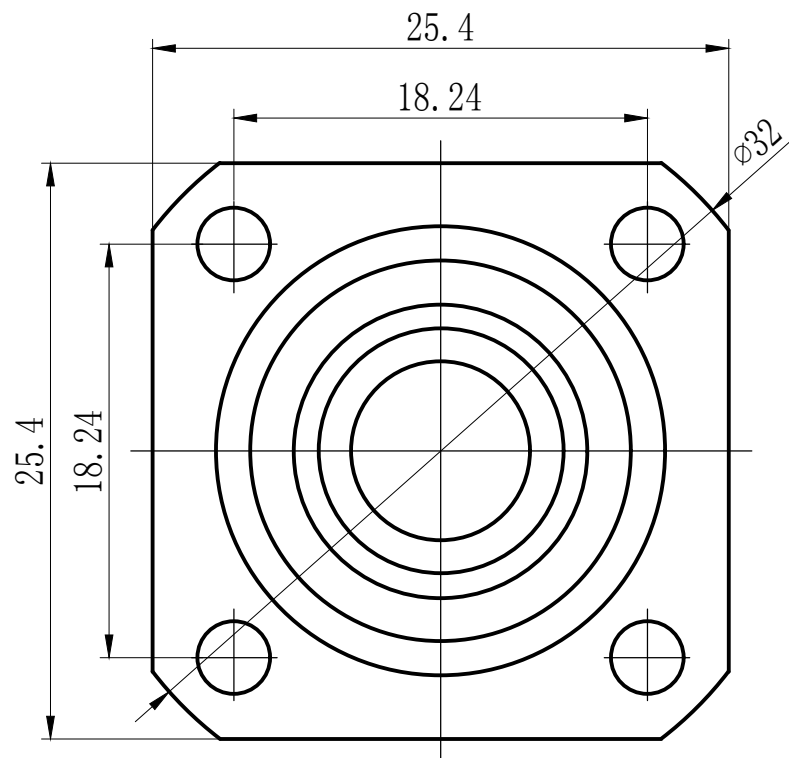

Material & Finishing:

1. Center condutor: Phosphor Bronze, Silver Plating
2. Insulators: PTFE
3. Body : Brass, Ternary Alloy Plating
4. Gasket: Silicone Rubber

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6 GHz
3. VSWR: 1.15(0~3GHz)
4. Dielectric Resistance: $\geq 5000M\Omega$
5. IPM: $\leq -160dBc$

RoHS Compliant.

UNLESS OTHERWISE NOTED
ALL SURFACES FINISHED TO 64 MAX.

ALL TOLERANCES ARE:		
DECIMALS	FRACTIONS	ANGLES
$x \pm 1.0$	$\pm 1/64$	$x' \pm 1'$
$x.x \pm 0.5$		$x'x' \pm 0.5'$
	$x.xx \pm 0.1$	

RayNool
Raynool Technology Co., Ltd.

THESE DRAWING & SPEC. ARE THE
PROPERTY OF Raynool
AND SHALL NOT BE REPRODUCED, OR
COPIED OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS OR
DEVICES WITHOUT THEIR EXPRESS WRITTEN
CONSENT.

4.3/1.0 FEMALE FOR 1/4" CORRUGATED CABLE

Drawn by	Ckd by	Appd by	Date 12/07/2019
Scale 2:1	Sheet 1 of 1		

Unit:mm